





# why! W670SZQ1 Processor Replacement

Written By: Felice Suglia


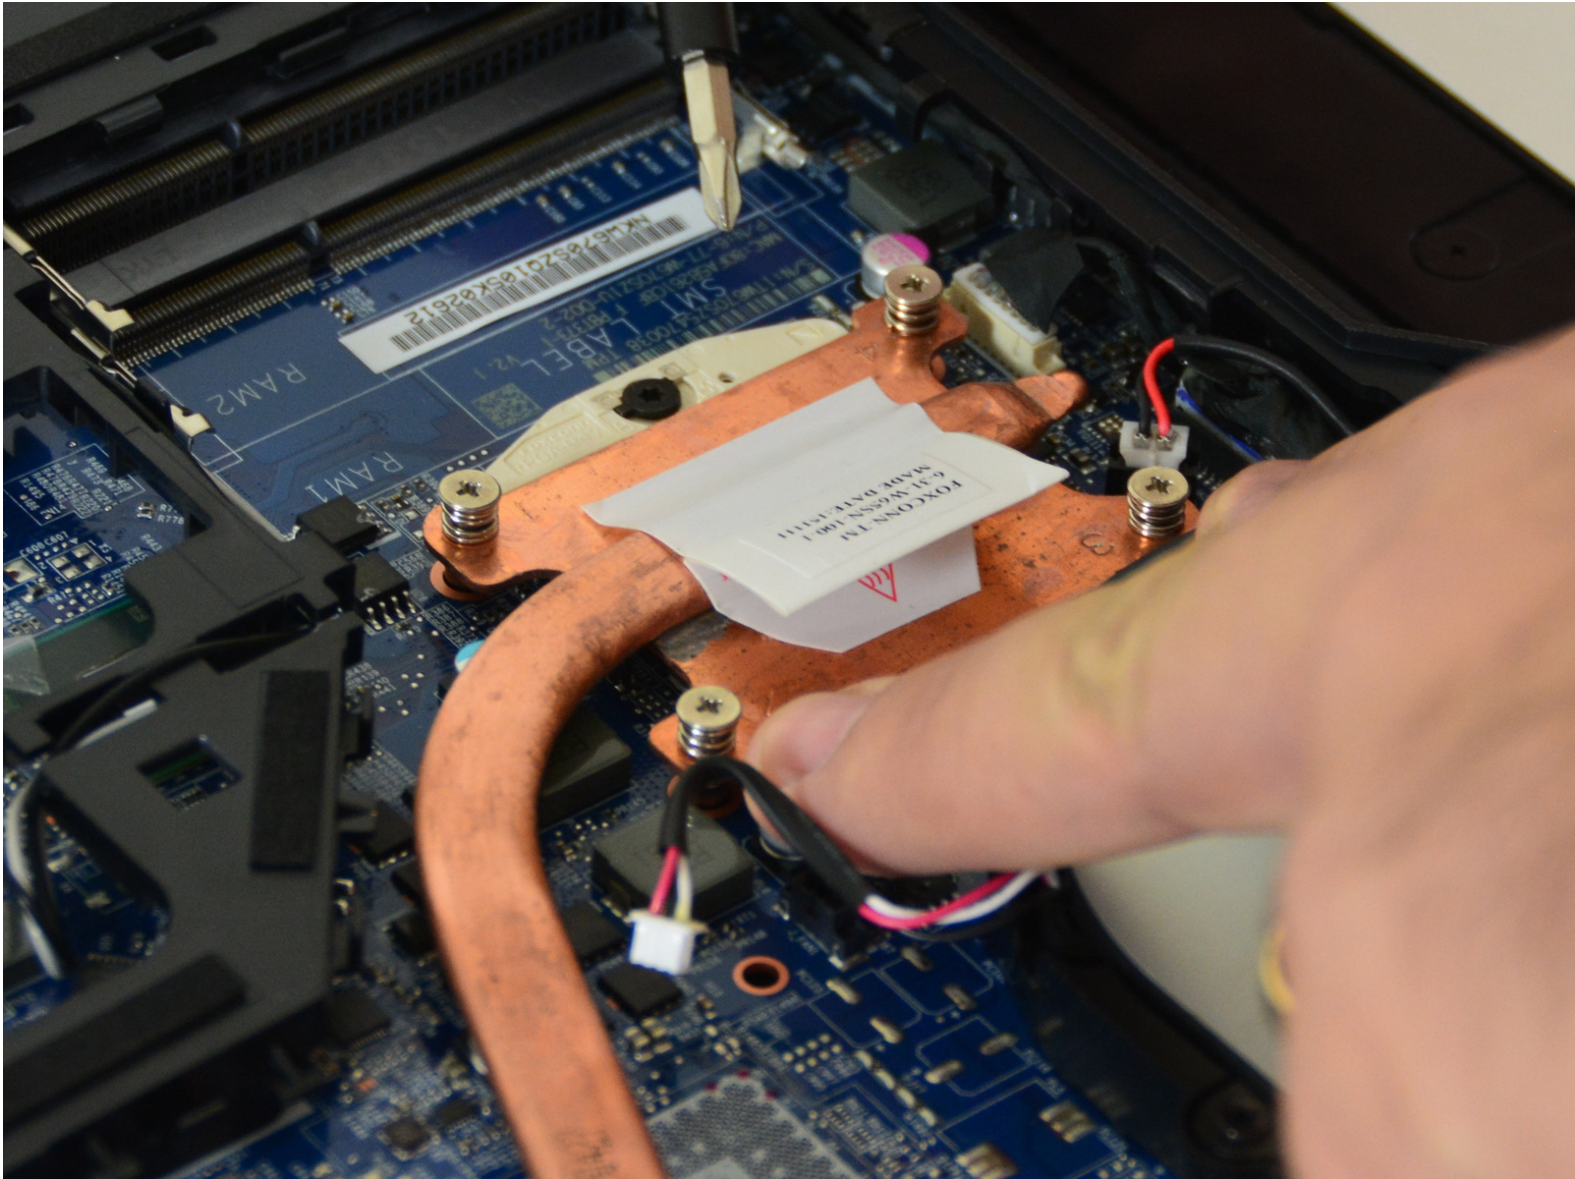


## Step 1 — Battery

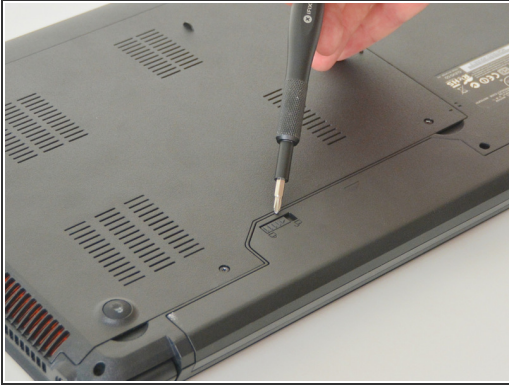

- Unlock the left latch.
- Unlock the right latch.
- Remove the battery while maintaining the unlocked latch.


## Step 2 — Access to the Main Components

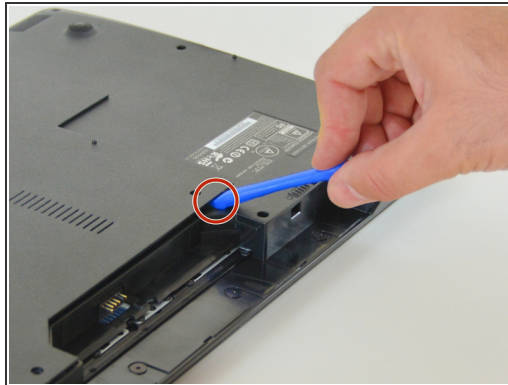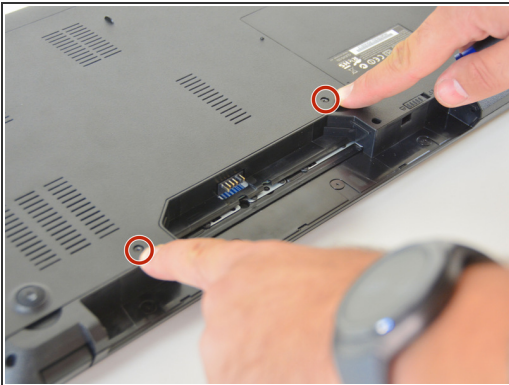

- Using the Philips screwdriver # 0, remove the 2 screws from the bottom cover.
- Lift the bottom right cover with the iFixit Opening Tool.
- Lift the cover lower left with the iFixit Opening Tool.
- Finally completely clear the lower cover to view the main components.



## Step 3 — The processor

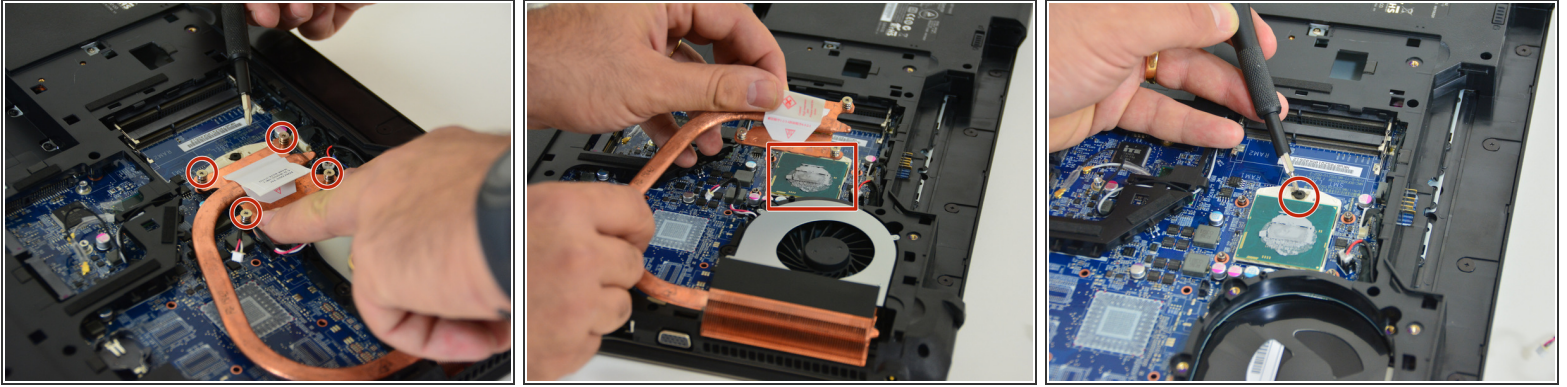

- Using the Phillips screwdriver, unscrew the 4 screws holding the processor cooling radiator.
- Remove the cooling radiator. After removing the radiator you can see the processor with its latch.
- Unlock now the processor using a small screwdriver. Then remove it gently.

Pour réassembler votre appareil, suivez les instructions dans l'ordre inverse.

This document was last generated on 2017-07-02 12:55:27 AM.